

# PL H 6W BYP E26 TITANIUM LED SERIES



6W REPLACES



**13W  
CFL**

60% Energy Savings

**PRO**




- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with E26 bases**
- ⌚ **Exceptional efficacy 93 LPW**
- ⌚ **Lasts 4 times longer than CFL**
- ⌚ **Compact form factor fits most fixtures**
- ⌚ **Available in 3000K, 3500K & 4000K**




## PL PRODUCT FEATURES

### BYPass Installation

This PL H lamp requires bypassing the ballast during installation and runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

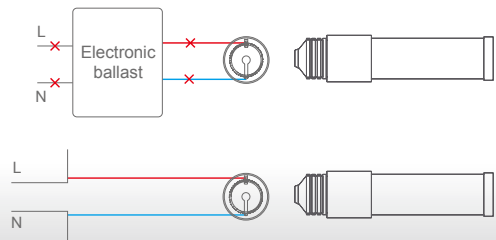

### Adjustable Base

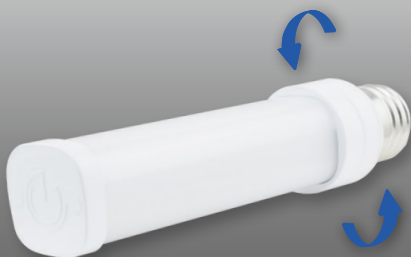

This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

# PL H 6W BYP E26 TITANIUM LED SERIES



## APPLICATIONS

### Retail




### Hospitality



### Office



**Base:** E26  
**Voltage:** 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.15lb / 68g

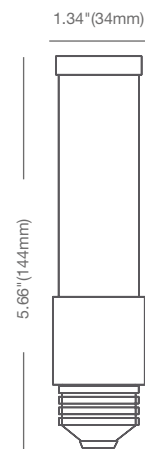

Ref.#: DS158-PLH-6W-BYP-E26

## SPECIFICATIONS\*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>6PLH/830/BYP/E26</b>	57925	6	Warm White 3000K	80	550	92	110°
<b>6PLH/835/BYP/E26</b>	57926	6	Neutral White 3500K	80	550	92	110°
<b>6PLH/840/BYP/E26</b>	57927	6	Cool White 4000K	80	560	93	110°

\* Specification data is preliminary and may be subject to change  
 \*\* Suitable for damp locations. Not for use where directly exposed to weather or water  
 \*\*\* Not intended for use in enclosed fixtures  
 \*\*\*\* Full installation guide and more details available on website